

```
Applications Places System ?
jue nov 29, 18:42 jmcl

jmcl@ns1: ~
File Edit View Terminal Help
04. jmcl@ns1:~$ /etc/apache2#
bash: /etc/apache2#: No existe el fichero o el directorio
jmcl@ns1:~$ sudo apt-get install php5
```



```
Applications Places System ?
jue nov 29, 18:45 jmcl

jmcl@ns1: ~
File Edit View Terminal Help
04. ... waiting . [ OK ]
Seleccionando el paquete apache2-mpm-prefork previamente no seleccionado.
(Leyendo la base de datos ... 00%
143353 ficheros y directorios instalados actualmente.)
Desempaquetando apache2-mpm-prefork (de ../apache2-mpm-prefork_2.2.14-5ubuntu8.10_i386.deb) ...
Seleccionando el paquete php5-common previamente no seleccionado.
Desempaquetando php5-common (de ../php5-common_5.3.2-1ubuntu4.18_i386.deb) ...
Seleccionando el paquete libapache2-mod-php5 previamente no seleccionado.
Desempaquetando libapache2-mod-php5 (de ../libapache2-mod-php5_5.3.2-1ubuntu4.18_i386.deb) ...
Seleccionando el paquete php5 previamente no seleccionado.
Desempaquetando php5 (de ../php5_5.3.2-1ubuntu4.18_all.deb) ...
Configurando apache2-mpm-prefork (2.2.14-5ubuntu8.10) ...
* Starting web server apache2 [ OK ]

Configurando php5-common (5.3.2-1ubuntu4.18) ...
Configurando libapache2-mod-php5 (5.3.2-1ubuntu4.18) ...

Creating config file /etc/php5/apache2/php.ini with new version
* Reloading web server config apache2 [ OK ]

Configurando php5 (5.3.2-1ubuntu4.18) ...
jmcl@ns1:~$
```

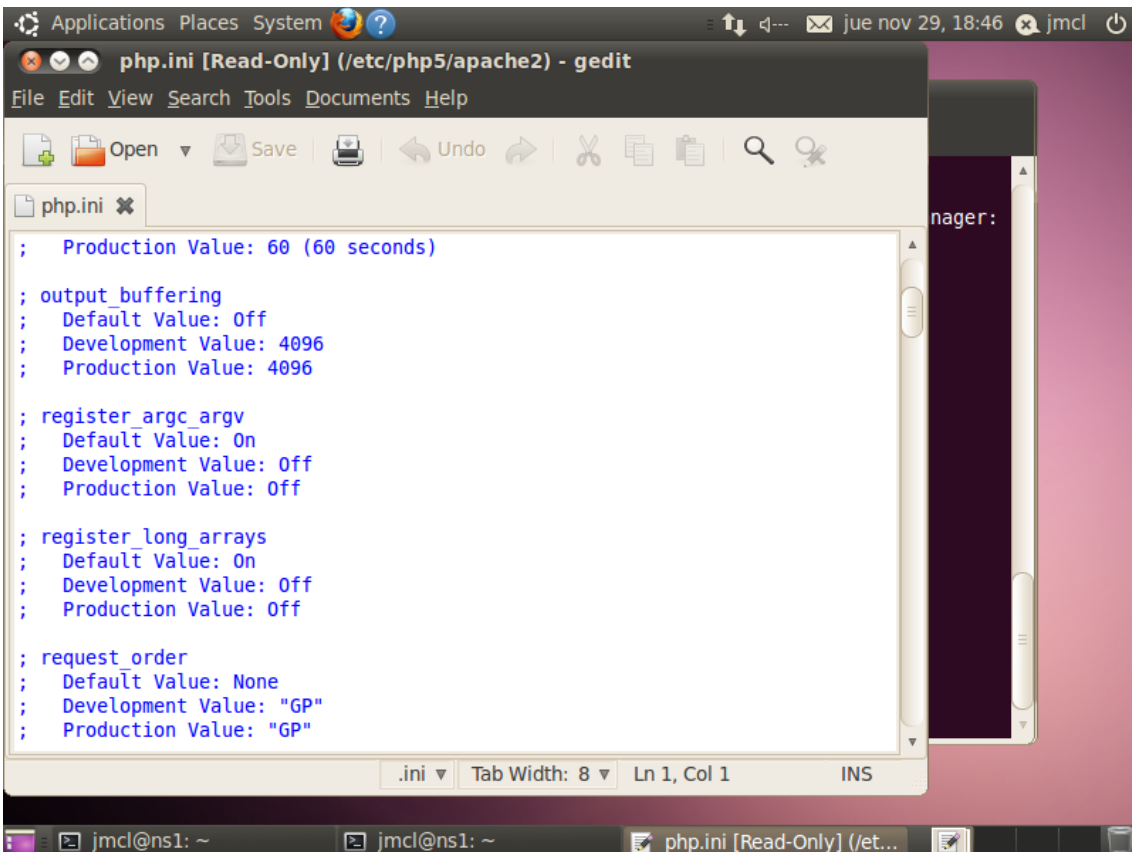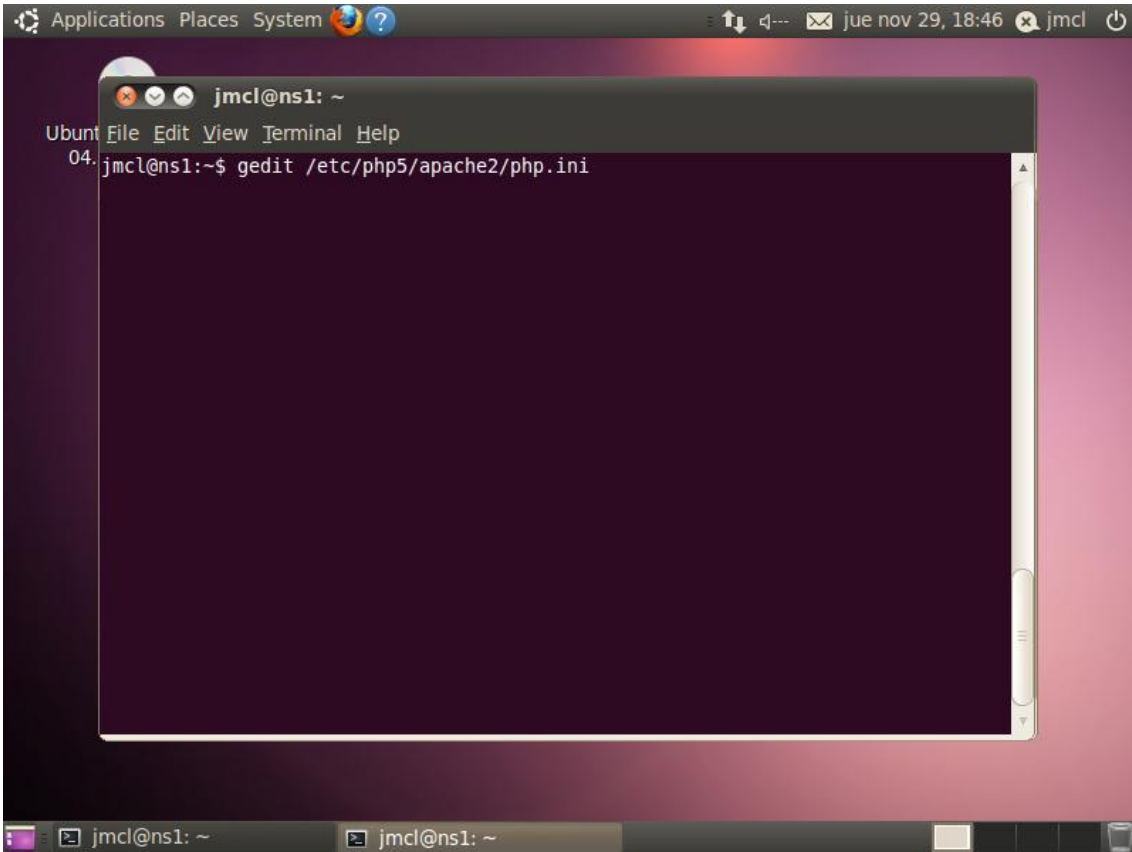

```
File Edit View Search Tools Documents Help
php.ini x
; definition, not at call time. This directive does not disable this
feature, it
; only determines whether PHP will warn you about it or not. These warnings
; should be enabled in development environments only.
; Default Value: On (Suppress warnings)
; Development Value: Off (Issue warnings)
; Production Value: Off (Issue warnings)
; http://php.net/allow-call-time-pass-reference
allow_call_time_pass_reference = Off

; Safe Mode
; http://php.net/safe-mode
safe_mode = Off

; By default, Safe Mode does a UID compare check when
; opening files. If you want to relax this to a GID compare,
; then turn on safe_mode_gid.
; http://php.net/safe-mode-gid
safe_mode_gid = Off

; When safe_mode is on, UID/GID checks are bypassed when
; including files from this directory and its subdirectories.

.ini Tab Width: 8 Ln 338, Col 1 INS
```

```
Applications Places System
jue nov 29, 18:48 jmcl
jmcl@ns1: ~
04. jmcl@ns1:~$ sudo /etc/init.d/apache2 restart
* Restarting web server apache2
... waiting [ OK ]
jmcl@ns1:~$
```

